



$\mu''(\mu'')$ -Frequency

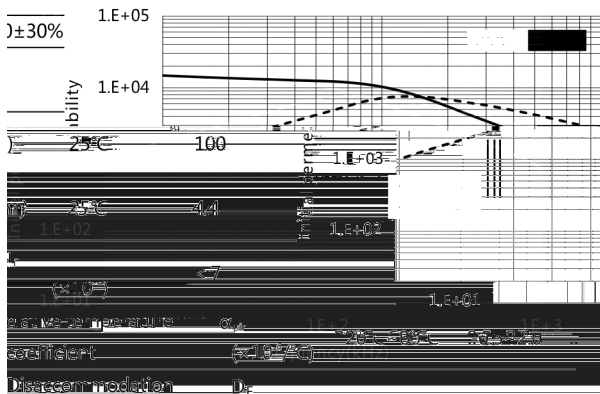



Initial permeability	$\mu_i$	25°C	15000
Saturation magnetic flux density	$B_s$ (mT)	25°C	360
			1194A/m

factor	( $\times 10^{-6}$ )	1~10min	<2.0
Initial permeability			30000
all resistivity	$\rho$ ( $\Omega \cdot m$ )	0.15	
	$d$ (kg/m <sup>3</sup> )	$4.95 \times 10^3$	
$r_e$ : Toroid(mm)			
D <sub>1</sub> : 18			
D <sub>2</sub> : 8			
H: 5			

$\mu_i$ -Temperature

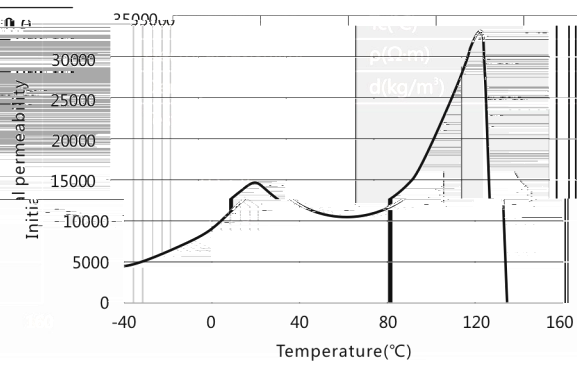

B-H

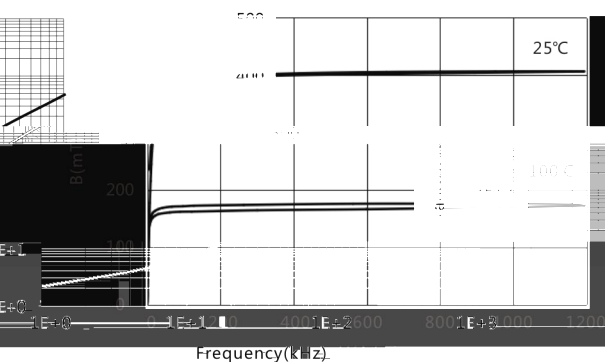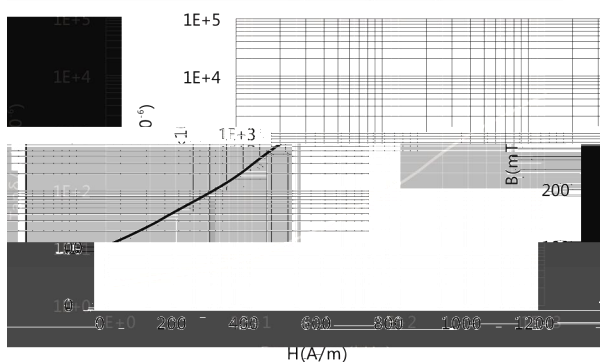


H(A/m)

Frequency(kHz)

Z-Frequency

N=10TS,  $\Phi$  0.35mm, T=25°C

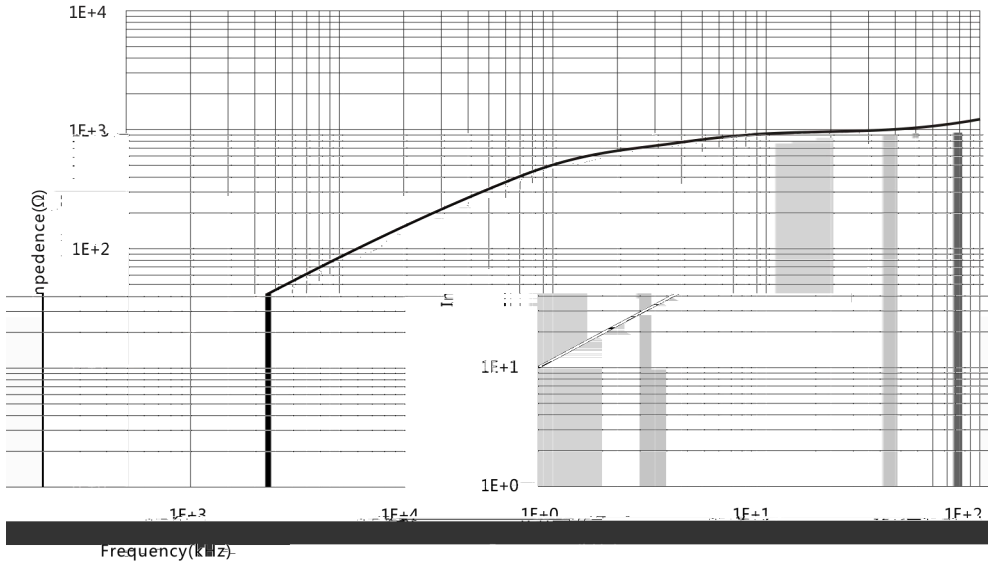

Bs-Temperature

H=1194A/m

